

VicSpacer MKII

HF PA PS WS

VicSpacer MKII is a fixation system for Flat Panel VMT already assembled for an easier application.


The VicSpacer MKII enhances the acoustic performance of the Flat Panel VMT in medium and low-frequency ranges by positioning the panel 40 mm away from walls or ceilings.

Its mounting system ensures compatibility of Flat Panel VMT with the VicFix fixation system, including the VicFix Mini and J Profile System, commonly used with other Vicoustic solutions. The VicSpacer can be ceiling-mounted using the VicFix J Profile 2m, or utilized as a Bass Trap when placed in corners with the VicFix Corner Plus. Additionally, it can be securely attached directly to walls or ceilings with screws.

Crafted from wood and lacquered steel, the VicSpacer MKII is designed to conceal the white edges of the Flat Panel VMT, offering a sleek and modern aesthetic in White, Black, or Grey Matte finishes.

To use the VicSpacer, it must be paired with a 20 mm thick Flat Panel VMT (sold separately).

Acoustic Performance

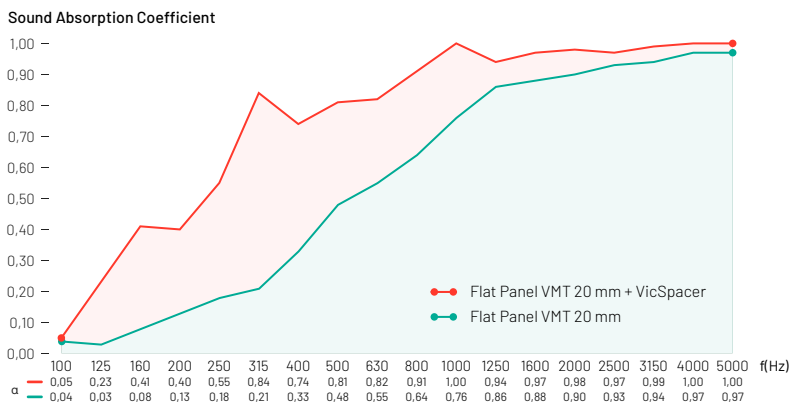

Technical Information

Dimensions: 1194×599×66mm / 47"×23.6"×2.6" (L×H×W, per panel)

Weight: 6kg / 13.2lb (per panel)

Raw Materials: Moisture Resistant MDF and Lacquered Steel

Acoustic Properties: Broadband Absorption; Bass Trap

NRC: 0.85 (with Flat Panel VMT 20 mm, not included)


Installation/Accessories: VicFix Mini (included), Flexi Glue Ultra, VicFix J Profile, VicFix Corner Plus

Packaging Information

Units per Box: 2 units/box; **Box Dimensions:** 1260×675×150mm / 49.6"×26.6"×5.9";

Box Gross Weight: 14.35kg / 31.6lb

vicoustic.com/product/vicspacer-mkii

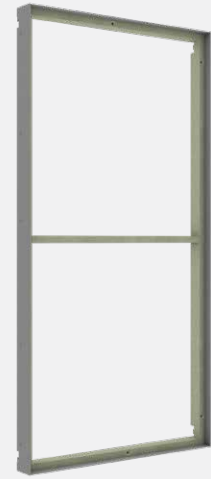

Laquered Finishes



White
Matte



Black
Matte



Grey
Matte

f(Hz)	Sound Absorption Coefficient
100	0.05
125	0.23
160	0.41
200	0.40
250	0.55
315	0.84
400	0.74
500	0.81
630	0.82
800	0.91
1000	1.00
1250	0.94
1600	0.97
2000	0.98
2500	0.97
3150	0.99
4000	1.00
5000	1.00

* For VicSpacer MKII + Flat Panel VMT 20 mm

Different product batches may show a color variation. Product dimensions of these panels have a tolerance of +/- 2mm. The product images used are illustrative and may differ from the actual product.

Info and Sales: sales@vicoustic.com

V/COUSTIC