

VicSpacer

A black and white photograph of a room with acoustic treatment. A large, rectangular, textured acoustic panel is mounted on the wall. To the right, a tall, narrow, rectangular acoustic panel is also mounted. In the foreground, a small, square, textured acoustic panel is on the floor. A potted plant is visible on the right. The room is dimly lit, with a bright light source creating a strong shadow on the wall.

V//COUSTIC
INNOVATIVE ACOUSTIC SOLUTIONS

Meet the new VicSpacer


VicSpacer is a new fixation system for Flat Panel VMT, specially developed to improve the acoustics of any room.

By spacing the panel 40 mm away from the walls / ceiling, VicSpacer helps to enhance the Flat Panel VMT acoustic performance in the medium / low-frequency regions.

VicSpacer will need to be combined with Flat Panel VMT of 20 mm thickness (not included).

Main features

- It makes Flat Panel VMT compatible with the VicFix J profile system
- Compatible with all sizes of Flat Panel VMT, including XXL panels (2380 × 1190 × 20 mm)
- Covers the white sides of Flat Panel VMT
- Improves substantially the acoustic performance of Flat Panel VMT
- Can be installed in the ceiling¹ and corners², acting as Bass Trap

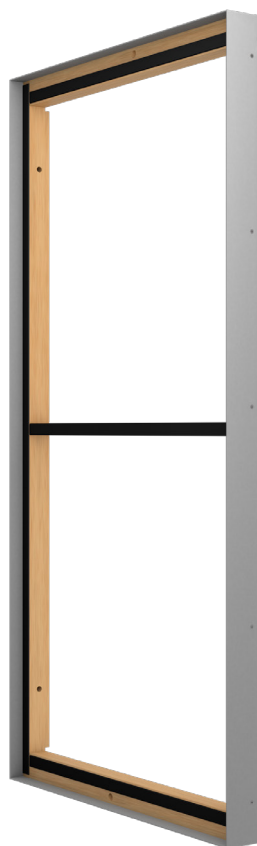

Colors



White
Matte



Black
Matte



Grey
Matte

¹ For ceiling installation do not use the VicFix Mini supplied with the product. Use the VicFix J Profile 2m (sold separately) or fix the panels with screws.

² For corner installation use VicFix Corner and VicFix 80 mm (sold separately).

Dimensions

1190 × 595 × 60 mm /
46.85" × 23.4" × 2.36"

Package Information

4 units/box

Technical Information

Raw Material:


Wood and Lacquered Steel

Installation: VicFix Mini (included);

VicFix J Profile

Performance

Sound Absorption Coefficient

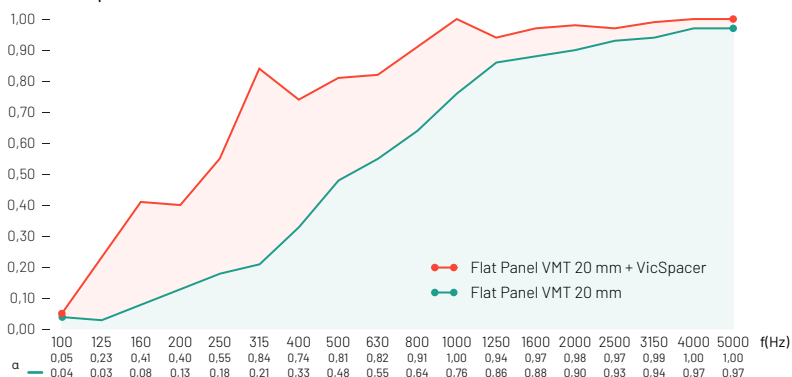

VicSpacer Plus

This version of the new VicSpacer includes 8 extra PET panels, to further improve the performance of the Flat Panel VMT.

By using one additional layer of PET to increase absorption, this new accessory will help to deal with the most demanding acoustic challenges.

VicSpacer Plus will need to be combined with Flat Panel VMT of 20 mm thickness (not included).

- A** Flat Panel VMT (1190 × 595 × 20 mm, not included)
- B** VicPET Wool (542 × 555 × 40 mm, only included in VicSpacer Plus)
- C** Wood frame
- D** Velcro stripe
- E** VicFix Mini
- F** Coated steel frame



Colors



White
Matte



Black
Matte



Grey
Matte

Dimensions

1190 × 595 × 60 mm /
46.85" × 23.4" × 2.36"

Package Information

4 units/box


Technical Information


Raw Material: VicPET Wool, Wood
and Lacquered Steel


Installation: VicFix Mini (included);
VicFix J Profile

Performance

Sound Absorption Coefficient

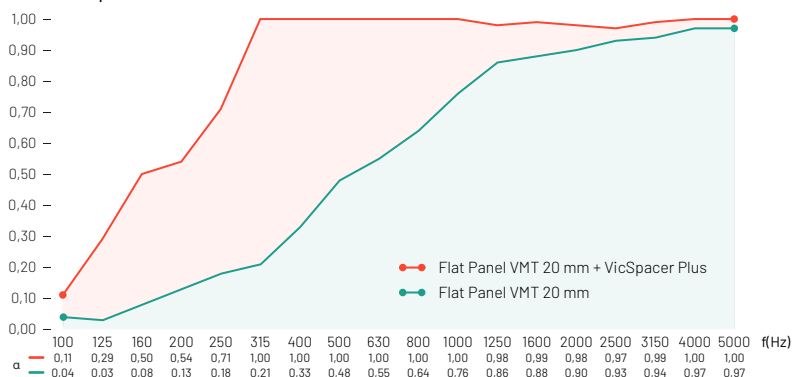

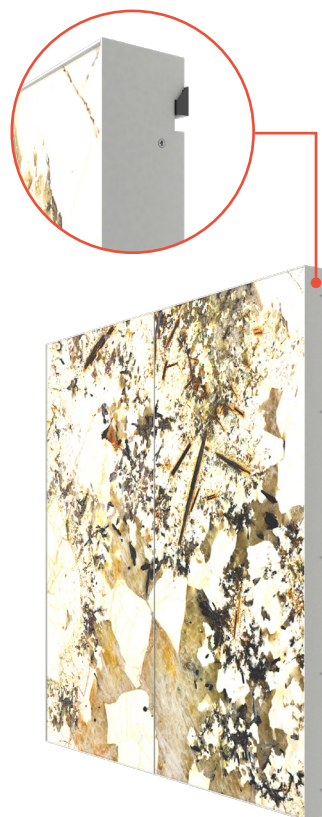

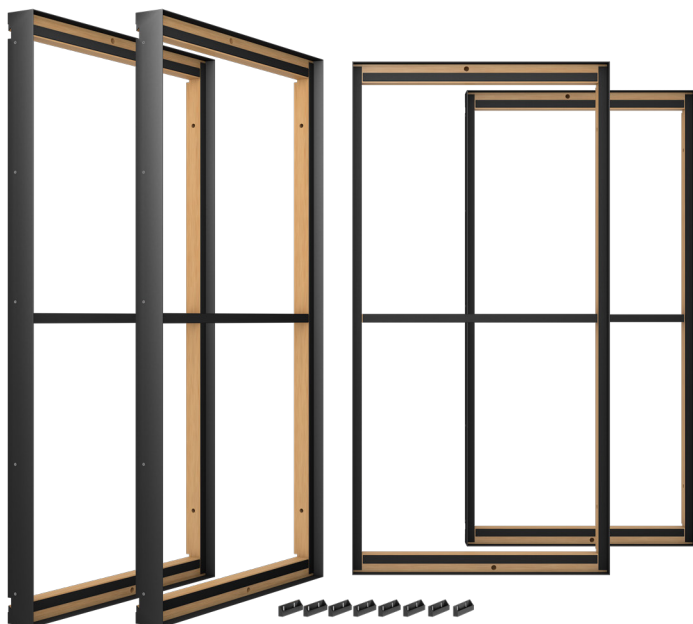

VicSpacer includes:

- 4 VicSpacers (1190 × 595 × 60 mm / 46.85" × 23.4" × 2.36")
- 8 VicFix Mini
- Hook Velcro tape
- Silicone drops

VicSpacer Plus includes:

- 4 VicSpacers (1190 × 595 × 60 mm / 46.85" × 23.4" × 2.36")
- 8 VicPET Wool (542 × 555 × 40 mm / 21.34" × 21.85" × 1.57")
- 8 VicFix Mini
- Hook Velcro tape
- Silicone drops



Main Office, R&D & Logistics

Avenida do Polo 3, Nº 159, Carvalhosa
4590-137 Paços de Ferreira, Portugal
M (+351) 917 851 019

Office

Rua Quinta do Bom Retiro Nº 16, Armazém 9
2820-690 Charneca da Caparica, Portugal
P (+351) 212 964 100

Info and Sales

E sales@vicoustic.com

Project Department

E projects@vicoustic.com

Marketing Department

E marketing@vicoustic.com

www.vicoustic.com

V/COUSTIC
INNOVATIVE ACOUSTIC SOLUTIONS

Feb 2021