

VicSpacer Plus MKII HF PA PS WS

VicSpacer Plus MKII is an acoustically enhanced fixation system for Flat Panel VMT already assembled for an easier application.


VicSpacer Plus MKII serves as an upgrade accessory to Vicoustic's flagship product Flat Panel VMT, specially developed to improve the acoustics of any room. This version of VicSpacer includes 8 extra PET panels, to further improve the performance of Flat Panel VMT. By using one additional layer of PET to increase absorption, this new accessory will help to deal with the most demanding acoustic challenges, with a sustainable solution made mainly from recycled plastic.

Its mounting system ensures compatibility of Flat Panel VMT with the VicFix fixation system, including the VicFix Mini and J Profile System, commonly used with other Vicoustic solutions. The VicSpacer can be ceiling-mounted using the VicFix J Profile 2m, or utilized as a Bass Trap when placed in corners with the VicFix Corner Plus. Additionally, it can be securely attached directly to walls or ceilings with screws.

Crafted from wood and lacquered steel, the VicSpacer MKII is designed to conceal the white edges of the Flat Panel VMT, offering a sleek and modern aesthetic in White, Black, or Grey Matte finishes.

To use the VicSpacer Plus MKII, it must be paired with a 20 mm thick Flat Panel VMT (sold separately).

Acoustic Performance

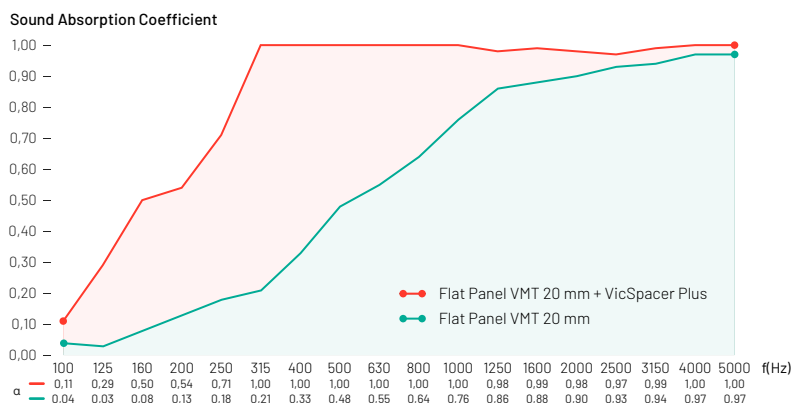

Technical Information

Dimensions: 1194×599×66mm / 47"×23.6"×2.6" (L×H×W, per panel)

Weight: 6.9kg / 15.2lb (per panel)

Raw Materials: Moisture Resistant MDF, Lacquered Steel and VicPET Wool

Acoustic Properties: Broadband Absorption; Bass Trap

NRC: 0.95 (with Flat Panel VMT 20 mm, not included)

Installation/Accessories: VicFix Mini (included), Flexi Glue Ultra, VicFix J Profile, VicFix Corner Plus

Packaging Information

Units per Box: 2 units/box; **Box Dimensions:** 1260×675×150mm / 49.6"×26.6"×5.9";

Box Gross Weight: 15.25kg / 33.6lb

vicoustic.com/product/vicspacer-plus-mkii



Laquered Finishes



White
Matte



Black
Matte



Grey
Matte

f(Hz)	Sound Absorption Coefficient
100	0.11
125	0.29
160	0.50
200	0.54
250	0.71
315	1.00
400	1.00
500	1.00
630	1.00
800	1.00
1000	1.00
1250	0.98
1600	0.99
2000	0.98
2500	0.97
3150	0.99
4000	1.00
5000	1.00

* For VicSpacer Plus MKII + Flat Panel VMT 20 mm

Different product batches may show a color variation. Product dimensions of these panels have a tolerance of +/- 2mm. The product images used are illustrative and may differ from the actual product.

Info and Sales: sales@vicoustic.com

VICOUSTIC